



sparco
Kids


CHILD CAR SEAT SK7000I

INSTRUCTION MANUAL

GB

ES



40-150
cm

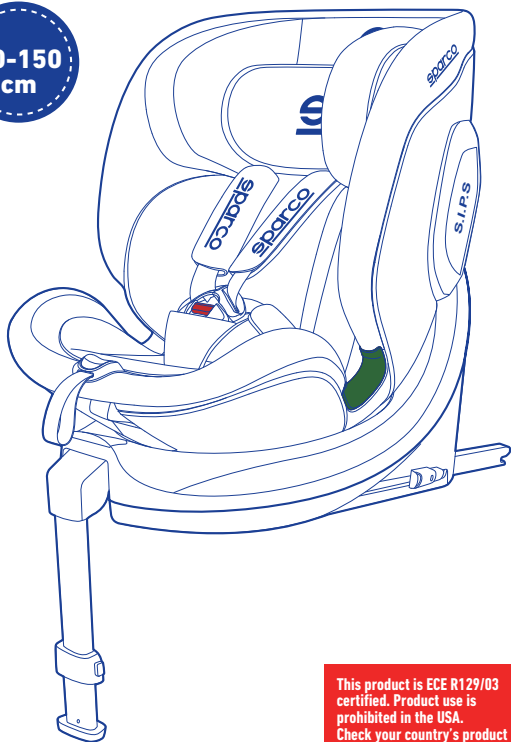

ECE R129/03



This product is ECE R129/03 certified. Product use is prohibited in the USA. Check your country's product compliance regulations prior to use.

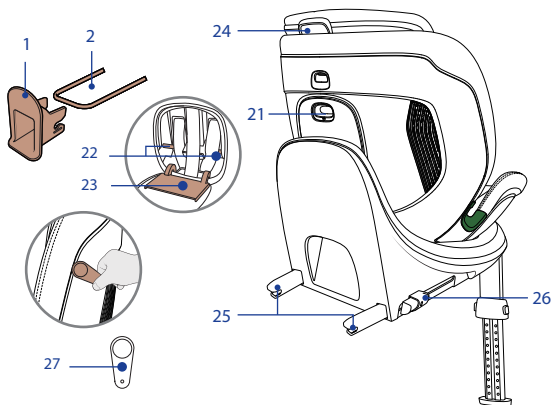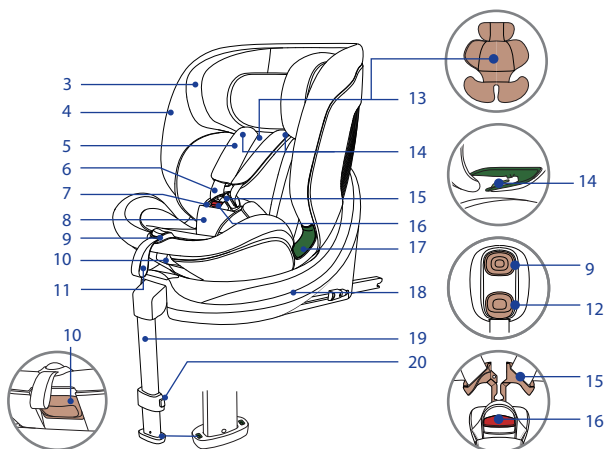





WARNING!

Read the instructions carefully before using and keep for future reference.

- 1 ISOFIX Insertion Aids (optional)
- 2 ISOFIX Fastening Points (vehicle)
- 3 Headrest
- 4 Seat Cover
- 5 Shoulder Pads
- 6 Shoulder Straps
- 7 Harness Buckle
- 8 Crotch Pad
- 9 Adjustment Button
- 10 Recline Handle
- 11 Crotch Strap
- 12 360° Rotation Adjuster
- 13 Seat "Cradleyou" Reducer
- 14 Belt Guidance
- 15 Buckle Tongues
- 16 Red Release Button
- 17 Belt Guidance
- 18 Base
- 19 Support Leg
- 20 Adjustment Buttons
- 21 Instruction Back Cover Button
- 22 Shoulder Belt Connector
- 23 Instruction Back Cover (can insert instruction into it)
- 24 Headrest Height Adjuster
- 25 ISOFIX Locking Arms
- 26 ISOFIX Buttons
- 27 R-elf


ROTATION

1.1



ADJUSTING THE SEAT ANGLE

2.1

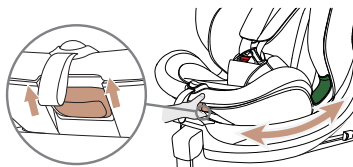


✓1

First Level



✓2

Second Level




✓3

Third Level



✓4


Fourth Level




2.2




Fifth Level




Sixth Level



Seventh Level




Eighth Level




PUTTING THE CHILD IN

3.1

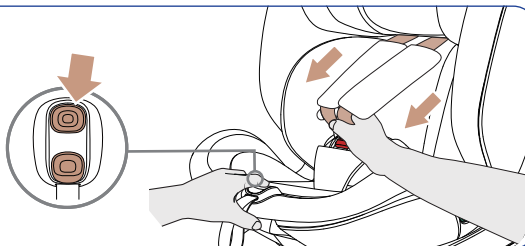


PUTTING THE CHILD IN



3.2




3.3




3.4



3.5



3.6



STORE 5-POINT HARNESS

GB

ES

FR



DE

IT


PT

NL



4.1



4.2




4.3




isoFIX AND SUPPORT LEG


5.1




5.2





5.3



5.4



5.5



isoFIX AND SUPPORT LEG

GB

ES

FR


DE

IT

PT

NL

5.6



5.7



5.8




USING CHILD SAFETY SEAT

6.1



40-87CM




40-105CM

6.2




40-87CM



76-105CM


USING CHILD SAFETY SEAT

6.3



100-150CM

6.4



6.5



CLEAN

GB

ES

FR


DE

IT


PT

NL

7.1



7.2

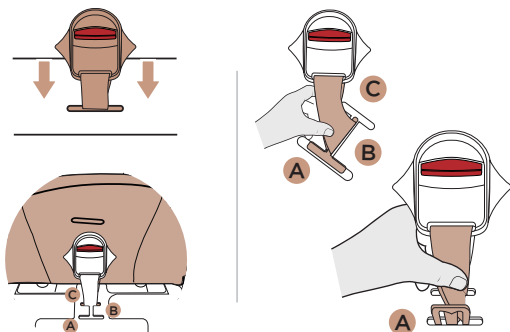

APPROVAL

These instructions use the following symbols:

Symbol	Keyword	Explanation
	DANGER!	RISK of severe personal injury
	WARNING!	RISK of minor personal injury
	CAUTION!	RISK of material damage
	TIP!	Useful notes

The SK7000I is exclusively intended to secure your child in your vehicle.

i-Size	Tested and approved according to ECE R129		
	Body size	Installation method	Installation direction
	40-105cm; ≤18kg	ISOFIX+Support Leg Harness	Facing backwards
	76-105cm; ≤18kg	ISOFIX+Support Leg Harness	Facing forwards
	100-150cm	Belt+ISOFIX	Facing forwards
		Belt	

*ECE=European Standard for Child Safety Equipment.

The child safety seat has been designed, tested and approved according to the requirements of the European Standard for Child Safety Equipment (ECE R129/03). The seal of approval "E" (in a circle) and the approval number are located on the orange approval label (sticker on the child safety seat).

-  **DANGER!** This certification will be invalidated if you make any modifications to the child safety seat. Only the manufacturer is permitted to make modifications to the child safety seat.
-  **DANGER!** Use the SK7000I exclusively for securing your child in your vehicle. It is in no way suitable for using as a seat or toy at home.

USE IN THE VEHICLE

GB

ES

FR

DE

IT

PT

NL

Please refer to the vehicle handbook information about vehicle seats which is certified for the use of children's restraining systems according to ECE R16.

During use, be sure to observe any restrictions relating to airbags.

SK7000I usage options:


Safety seat	Vehicle seating position with ISOFIX	
	i-Size	NOT i-Size
SK7000I	✓	✓

You can use your child safety seat as follows:

Facing forwards (in the direction of travel)	Yes ②③
Facing backwards (against the direction of travel)	Yes ①



With 2-point safety belt	No
With 3-point safety belt	Yes ③
On seats featuring: ISOFIX fastenings	Yes ①②③
Only use on this Seat if a lap and diagonal Seat belt is fitted.	Yes ②

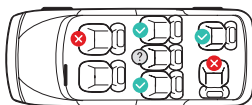

① When using as i-Size (40-105cm).

This ECRS is suitable for vehicles equipped with the ECE R14 requirements. And only after installing ISOFIX, then can use it.

② When using as i-Size (76-105cm).

This ECRS is suitable for vehicles equipped with the ECE R14 requirements. And only after installing ISOFIX, then can use it.

③ When using as i-Size booster seat (100-150cm).

This ECRS is suitable for adult seat belt models equipped with the 3-point adult seat belts that has passed the ECE R16 requirement and is not suitable for models only equipped with 2-point adult seat belts.

(Please observe the applicable regulations in force in your country)

1. Facing backwards (against the direction of travel) 40-105cm: Do not use on passenger seats with an active front airbag!

2. Facing forwards (in the direction of travel) 76-150cm: If there is a passenger airbag: Slide the passenger seat well backwards and follow any relevant directions in your vehicle's handbook, please ensure that the airbag is deactivated.



WARNING!

Do not use facing forwards before the child's age exceeds 15 months (refer to instruction).

1. ROTATION

- 1.1 Pull the 360° rotation adjuster (12) out with your finger, rotate the seat shell.
Rotate the seat shell 90° towards the vehicle door. Now you can put your child in or take him/her out easily.

Rotate the seat shell 90° again so it is facing either forwards or backwards, depending on the height of your child, until it engages with a clicking sound.



DANGER!

When the seat is rotated to 90°, the user can place the child in this position, but he/she can not use this angle during driving.

2. ADJUSTING THE SEAT ANGLE

- 2.1 Pull the recline handle (10) and pull the seat outwards, then the seat can be adjusted. It can be adjusted to 4 positions for facing forwards use and 4 positions for facing backwards use. Different height need use different recline levels.

76-105cm: facing forwards installation, use first level to forth level.

100-150cm: facing forwards installation, use first level.

- 2.2 40-105cm: facing backwards installation, use fifth level to eighth level.

3.PUTTING THE CHILD IN

- 3.1 Press the strap adjustment button (9) and loosen the shoulder straps (6) of the child seat as much as possible.
- 3.2 To open the harness buckle (7) by pressing the red release button (16) then put the child in the safety seat.
- 3.3 Put the two buckle tongues (15) together and push them into the harness buckle (7) until they engage with a clicking sound.



DANGER!

If your child tries to press the ISOFIX buttons or the harness buckle button, stop immediately as soon as possible. Check whether the child safety seat is correctly fastened and ensure that your child is correctly secured. Explain to your child the dangers associated with their actions.

- 3.4 Pull the headrest height adjuster (24) , select the correct height of the headrest (3) and engage it in position that fits your child by releasing the adjuster.
- 3.5 Adjust the headrest (3) to proper position, with shoulder straps (6) slightly higher or equal to child's shoulders. Make sure the distance between child's shoulder and the bottom of the headrest is lower than one finger.
- 3.6 Pull the crotch Strap (11) until the strap lies flat and comfortable on your child's body.

4.STORE 5-POINT HARNESS

The child's height is more than 100 cm, the 5-point safety harness should be stored away and the child should be secured with the adult seat belt.

- 4.1 Open the harness buckle (7) (refer to 3.2). Remove the seat "cradleyou" reducer (13) and crotch pad (8) .
- 4.2 Remove the elastic band on the seat cover (4) from the hook. Hide the shoulder pads (5) behind of the seat cover (4).
- 4.3 Pull down harness buckle (7) across seat cover (4). Close and hide it to the storage.

REATTACH THE 5-POINT HARNESS:

Follow the steps for <store 5-point harness> in reverse order.

5.ISOFIX AND SUPPORT LEG

- 5.1 If your vehicle is not fitted with ISOFIX insertion aids(vehicle) as standard, clamp the two ISOFIX insertion aids (1) , which are included in the scope of delivery of the seat , with the opening pointing upwards, to the two ISOFIX fastening points (2) of your vehicle. If you don't have ISOFIX insertion aids (1) , please ignore this step.



TIP! The ISOFIX fastening points are located between the surface and the backrest of the vehicle seat.



TIP! The ISOFIX insertion aids facilitate the installation of the child safety seat with the use of the ISOFIX fastening points and prevent damage to the vehicle seat covers. As long as they are not used, remove them and keep them in a safe place. For vehicles with a folding backrest, the ISOFIX insertion aids need to be removed before folding the backrest. Any problems occurring usually come from soiling or external objects on the insertion aids and on the hook. Remove soiling or external objects to rectify such problems.

- 5.2 Press the ISOFIX buttons (26) to push out the two ISOFIX locking arms (25) from the base.
- 5.3 Push back the seat until the seat is firmly against the vehicle seat then you hear a clicking sound which indicates they are fully engaged. And on both sides of the ISOFIX indicator from red to green safety color.
- 5.4 Release ISOFIX buttons (26) towards each other to loosen the ISOFIX fastening points (2) on both sides. Move the ISOFIX locking arms (25) back into the seat base.



TIP! The ISOFIX locking arms are protected against damage when they are pushed back into the seat base.

- 5.5 Pull the support leg (19) away from the base bottom of the child safety seat until the support leg (19) is fully extended.
- 5.6 Press both adjustment buttons (20) and pull out the support leg (19) until it makes firm contact with vehicle floor and the support leg indicators are green.
- 5.7 Retract the support leg (19) to the base.

- 5.8 Move the child safety seat backwards and push the backrest against the vehicle seat.



CAUTION:

The child safety seat must always be secured when it is in the vehicle, even if no child is being transported.

6.USING THE CHILD SAFETY SEAT

- 6.1 40-105cm:Installed in facing backwards position with ISOFIX(refer to 5.2,5.3)and Support Leg(refer to 5.5,5.6).
- 6.2 76-105cm:Installed in facing forwards position with ISOFIX(refer to 5.2,5.3,5.8) and Support Leg(refer to 5.5,5.6).



WARNING!

Remove the seat "cradleyou" reducer (13) accordingly when your baby is >87cm.

- 6.3 100-150cm:Installed in facing forwards position with ISOFIX and adult seat belt or only adult seat belt
Use ISOFIX (refer to 5.2,5.3). If you don't use ISOFIX,please ignore this step. Install the child safety seat with adult seat belt.Make sure that seat "cradleyou" reducer (13) has removed.



TIP! When you use this safety car seat in 100- 150cm, please store the 5-point harness and fold support leg into the seat base.

- 6.4 Pull out the belt from the belt ALR (Automatic Locking Retractor). Diagonal belt through the same side of belt guidance (14) on headrest, then pull the diagonal belt and lap belt together through the other belt guidance (17) on the base. Keep the diagonal belt at the position of belt guidance (14) between the outside of the neck and shoulder (in the middle of point ③ and point ⑥).
- 6.5 Lock the tip of the buckle into the vehicle seat buckle with a clicking sound. Follow the direction of arrow to tighten belt, and put redundant belt into ALR. Shake the child safety car seat to make sure it is securely attached.



TIP! The diagonal adult seat belt section must run diagonally backward. You can adjust the course of the adult seat belt with your vehicle's ALR on both sides.



TIP! The importance of ensuring that any lap adult seat belt is worn low down, so that the pelvis is firmly engaged, shall be stressed.



CAUTION:

The adult seat belt must not be twisted or have their places changed over.

7. CLEAN

- 7.1 Open the shoulder pads (5) and remove it from the shoulder pads connector. The shoulder pads (5) can be washed in lukewarm soapy water.
- 7.2 Rotate the metal plate on crotch strap (11) from (c) by 90° vertically. Slide the metal plate through the harness slot in the way

(B) lies in horizontal position, then harness buckle (7) can take out from slot (A).

To re-install harness buckle (7), follow the steps refer (7.2) in reverse order, until the metal plate is hooked into the harness slot.

Thread the buckle through the crotch pad (8) on the cover.

Make sure the metal plate under slot (C) when you are using.



WARNING!

Tug hard crotch strap to make sure the metal plate is well secured in the seat shell.

To ensure the safety of your child, it is absolutely essential that the harness buckle continues to function correctly. Harness buckle (7) malfunctions are usually caused by a build-up of soiling or by external objects:

- When you press the red release button , it takes a long time for the buckle tongues to be ejected.
- The buckle tongues no longer engage (i.e. when you try to push them in, they pop out again).
- The buckle tongues engage without a clicking sound.
- The buckle tongues are difficult to push in (you feel a certain amount of resistance).
- The harness buckle only opens if extreme force is applied.



TIP! Remedy: Clean the harness buckle so that it functions properly again with no trouble.


Soak the harness buckle in warm water containing washing-up liquid for at least an hour. Rinse the buckle thoroughly and dry it.

CARE AND MAINTENANCE

Child safety seat

Only use authentic SK7000I seat covers. The seat cover is an integral part of the child safety seat and is key to ensure the trouble-free functionality of the system. Replacement seat covers are available from your dealer.

- The cover can be removed and washed with a mild detergent on a washing.
- The seat "cradleyou" reducer can be washed in the same way as the cover. Remove all foam parts from the top and bottom sections before washing. These must not be washed.
- The shoulder pads can be removed and washed in lukewarm soapy water.
- Open the seat cover and place the shoulder straps behind the seat cover.
- The plastic parts and the harness can be cleaned with soapy water. Do not use any caustic cleaning agents (such as solvents).



TIP! Use R-elf to assemble cover more easily.

DISPOSAL

Please observe the waste disposal regulations in your country.

Disposal of packaging	Container for cardboard boxes
Seat cover	Residual waste, waste incineration
Plastic parts	To be placed in the corresponding container according to labelling
Metal parts	Container for metals
Belt straps	Container for polyester
Buckle and tongue	Residual waste

SAFETY NOTES

NOTICE

Notice regarding i-Size category Enhanced Child Restraint Systems (40-105cm)

This is an i-Size Enhanced Child Restraint System. It is approved according to UN Regulation No. 129, for use in, i-Size compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle user's manual.

If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

Notice regarding i-Size booster seat category Enhanced Child Restraint Systems (100-150cm)

This is an i-Size booster seat Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use primarily in "i-Size seating positions" as indicated by vehicle manufacturers in the vehicle user's manual.

If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

DANGER!

Please carefully read and make sure you understand all instructions in this manual and in the vehicle handbook relate to child safety seats. Install and use the child safety seat as described in the instruction manual. Failure to do this could result in serious injury even death of your child. Keep the instructions together with the ECRS for future reference.

DANGER!

Because of potential medical issues inherent to low birth weight and premature infants, always have a trained professional doctor or hospital staff assess the suitability of the ECRS prior to leaving the hospital or using the ECRS.

Make sure any straps holding the ECRS to the vehicle should be tight. Any straps restraining the child should be adjusted to the child's body. Make sure straps should not be twisted, and Support Leg should be in firm contact with the vehicle floor.

Make sure in 100-150cm body size, the lap vehicle adult seat belt must be worn in such a way as to properly secure the pelvis of the child.

Make sure the ECRS is changed when it has been subject to violent stresses in an accident.

Make sure the rigid items and plastic parts of an ECRS shall be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.

DO NOT make any alterations or additions to the ECRS without the approval of the Type Approval Authority, or a danger occurs if not following closely the installation instructions provided by the manufacturer child restraint.

HOT! The child seat should be kept away from sunlight if the

seat is not provided with a textile cover, otherwise it may be too hot for the child's skin.

DO NOT leave your child unattended in this restraint even for a short time.

Make sure any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.

A) DO NOT use the ECRS without the cover.

B) DO NOT replace seat cover with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.

DO NOT use the ECRS if position of the vehicle seat buckle to the main load bearing points on the restraint is unsatisfactory, please contact the manufacturer in doubt about this point.

DO NOT use any load bearing points other than those described in the instructions and marked in the ECRS, please contact the manufacturer if in doubt about this point.

DO NOT use forward facing before the child's age exceeds 15 months (refer to instruction).

 WARNING!

The safest place for your baby is the rear of your car.
However, if you need to install the seat in the front passenger seat, please ensure that the airbag is deactivated.



Produced under Sparco's license by:
CARPA DESIGN EUROPE, S.L.
C/ Duque de Calabria, 4 bd, 46005 Valencia SPAIN
tel: +34 963 125 049, info@carpa-europe.com
www.carpa-europe.com

MANUALE
INSTRUCTION



Raccolta differenziata. Verifica le disposizioni locali.
Separate collection. Verify the local arrangements.